

DPH104

Ref. DPH104



ANALOG WAY®

4K image processor for LivePremier™ presentation systems and Picturall Mark II media servers. Easily drive four independent Full HD displays from one single 4K60 signal.




TAA Compliance: This product is manufactured in France, a TAA-designated country, and is fully compliant with the Trade Agreements Act (17 U.S.C. & 2501-2581).




Presentation

DPH104 is a high-performance latency-free 4K image processor able to convert one 4K DisplayPort output from a **LivePremier™ presentation system** or a **Picturall Mark II media server** to four independent 1080p HDMI™ outputs. All the outputs on the DPH104 can be used with native resolution just like they were directly connected to the source system. DPH104 does not require software or configuration, and guarantee an easy and trouble-free installation experience. DPH104 is a perfect fit for numerous video wall and soft-edge blending applications. You can use multiple DPH104 devices to easily create even larger display solutions.

Example 1: one 8K x 1K@60Hz input to four 1080p LED wall processors

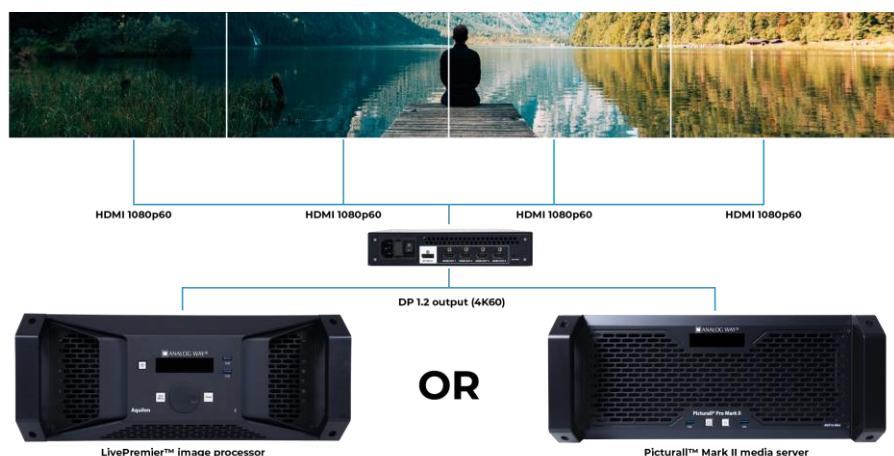


Example 2: one 8K x 1K@60Hz input to four 1080p projectors (*)

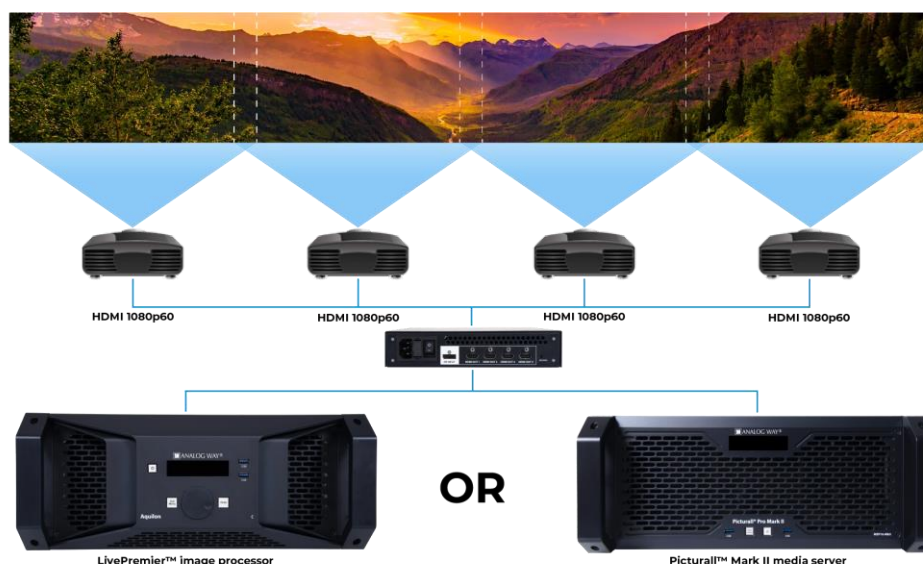

(*) soft-edge curve adjustments to be achieved with the projectors

Example 3: one 8K x 1K@60Hz input (with different contents) to four different screens

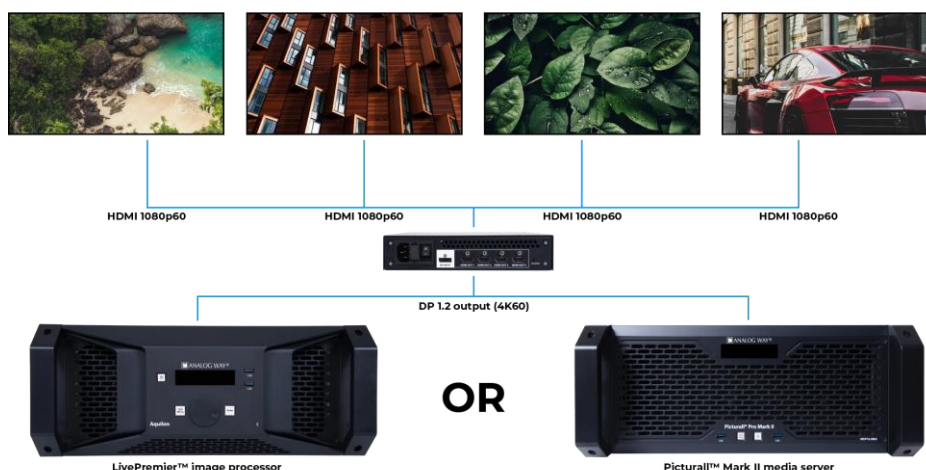

Key features

- ▶ Compatible with the LivePremier and Picturall series
- ▶ Ruggedized metal housing (1RU half rack)
- ▶ One DisplayPort input, four HDMI™ outputs
- ▶ HDCP 2.2 and 1.4 support on input and outputs
- ▶ Zero latency processing
- ▶ No software, no configuration
- ▶ Splicer mode: convert one 8Kx1K input to four full HD outputs
- ▶ Splitter mode: distribute one full HD input to four full HD outputs or one 4K UHD input to four 4K UHD outputs
- ▶ OSD status for easy system troubleshooting
- ▶ HDR compliant
- ▶ Multichannel audio with 2 routing modes
- ▶ Status LEDs for easy troubleshooting
- ▶ Mounting kit included to accommodate one or two DPH104 devices in one rack space
- ▶ Half-rack blanking plate included for unused space

Dimension (in Rack Units - RU)

- ▶ 1RU

Dimensions

- ▶ W 8.64" x H 1.73" x D 7.81"
- ▶ L 219.5 mm x H 44 mm x P 198.5 mm

Weight without accessories

- ▶ 1.7 kg / 3.75 lbs

Operating conditions

- ▶ Temperature: 0 to 40°C (32 to 104°F)
- ▶ Humidity: 10% to 80%, non-condensing

Noise (@1,6m height @25°C)

- ▶ Front: 35 DBa@1m
- ▶ Rear: 35 DBa@1m

Thermal dissipation

- ▶ 102 BTU/hr

Warranty

- ▶ 3-year warranty on parts and labor back to factory

Power supply

- ▶ 100-240 VAC 50/60Hz 2.2A
- ▶ Fuse cartridge T2,5A 250VAC 5x20mm
- ▶ Max consumption: 30 W

EMC & Environmental Compliance

- ▶ EN55032, EN55024, EN61000, FCC part15, ICES

Safety Compliance

- ▶ IEC/UL/EN 62368-1
- ▶ CSA22.2#62368-1
- ▶ UL Listed (E359143)

Supplied with

- ▶ 1 x Power supply cord
- ▶ 1 x Rackmount kit
- ▶ 1 x Quick start guide including safety instructions

Technical Specifications

INPUT

1x DisplayPort 1.2

OUTPUTS

4x HDMI™ 2.0

SLICER MODE

1x 7680x1080 (Analog Way custom timing) to 4x HD1080p

Supported rates: 24Hz, 25Hz, 30Hz, 50Hz, 59.94Hz and 60Hz

Or 1x 7680x1200 (Analog Way custom timing) to 4x 1920x1200 DMT

Supported rates: 24Hz, 25Hz, 30Hz, 50Hz and 60Hz

Or 1x 3840x2160 (Analog Way custom timing) to 2x 1920x2160

Supported rates: 25Hz, 30Hz, 50Hz, 59.94Hz and 60Hz

Supported chroma subsampling: 4:4:4, 4:2:2 and 4:2:0

Supported color depth: 8 bit and 10 bit

SPLITTER MODE

1x HD1080p to 4x 1HD1080p

Or 1x UHD2160p to 4x UHD2160p

Supported rates: 24Hz, 25Hz, 30Hz, 50Hz, 59.94Hz and 60Hz

Supported chroma subsampling: 4:4:4, 4:2:2 and 4:2:0

Supported color depth: 8 /10 bits (for 3840x2160 resolution: 10 bits at 60Hz supported with 4:2:2 or 4:2:0 chroma subsampling only)

PROCESSING

BT.709 and BT.2020 color spaces support

HDR compliant with HDR10 and HLG

Compatible with HDCP 1.4 and HDCP 2.2

AUDIO

Multichannel audio (PCM, up to 8 channels)

Mirror Mode: input audio duplicated to all outputs

Split Mode: input channels spread to outputs (for LivePremier only)

OTHER FEATURES

Firmware updates supported via USB

Front panel status LEDs (system, HDCP, input and output signal)

Output signal status can be displayed on each output (OSD) for easy troubleshooting

Specifications subject to change without prior notice