

QSFP+ Link card


for Aquilon series

Ref. ACC-AQL-OUT-LINK-QSFP CARD



ANALOG WAY®

Field swappable Link card equipped with 6x 40GbE QSFP+ cages for Aquilon series

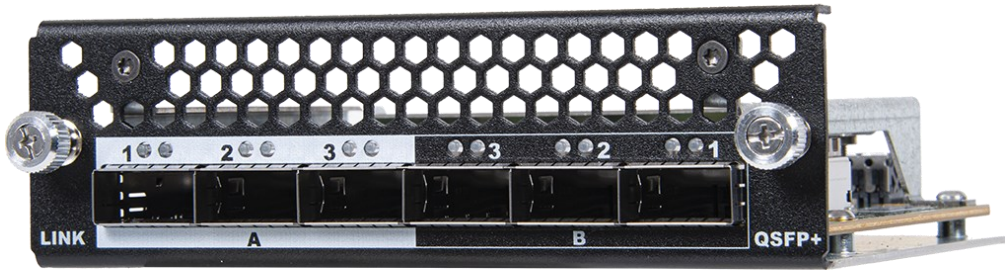

- 40GbE QSFP+ cages

Share 8 4K60p inputs

Share 16 2K/dual inputs

Direct Attached Cables


Single Mode LC Fibers

Overview

The Analog Way **ACC-AQL-OUT-LINK-QSFP** is a field-swappable link card equipped with six 40GbE QSFP+ cages. It allows to link any **Aquilon** live presentation switcher to any other Aquilon (any size, any type) also equipped with this card. Up to four units can be interconnected to create a ring sharing up to eight 2160p60/4K60p inputs or sixteen 2K/Dual 60Hz inputs.

Key features

- ▶ Six 40GbE QSFP+ cages (3 IN + 3 OUT)
- ▶ Allows to share up to 8x 4K60p inputs or 16x 2K/dual inputs
- ▶ Compatible with copper Direct Attached Cables up to 3m/9.8ft (ref. ACC-AQL-LINK-DAC-SET-1M and ref. ACC-AQL-LINK-DAC-SET-3M)
- ▶ Support of single-mode 40GQSFP+ modules with fibers (LC) for distances up to 500m/1640ft (ref. ACC-AQL-LINK-SM-TRX for one module)
- ▶ Connector status LEDs for easy troubleshooting
- ▶ Must be installed in the lowest output slot
- ▶ The OPT-RSX-LINK or OPT-AQL-LINK option must be installed first
- ▶ Field-swappable card (not hot-swappable)

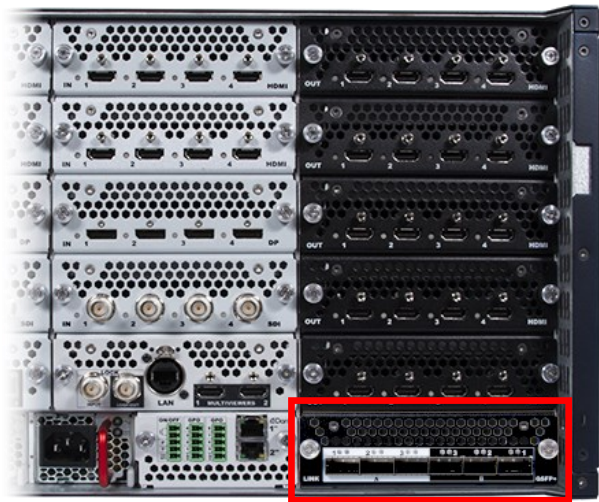

Dimensions ▶ W 5.61" x H 1.66" x D 5.80" ▶ L 142.6 mm x H 42.3 mm x P 147.4 mm Weight without accessories ▶ 0.34 kg / 0.75 lbs Shipping weight accessories included ▶ 0.54 kg / 1.19 lbs Operating conditions ▶ Temperature: 0 to 40°C (32 to 104°F) ▶ Humidity: 10% to 80%, non-condensing	Warranty ▶ 3-year warranty on parts and labor back to factory ▶ Broken connectors are not covered by warranty Power supply ▶ Powered from Aquilon switcher Safety Compliance ▶ IEC/UL/EN 62368-1 ▶ CSA22.2#62368-1 ▶ (UL Listed E359143)
---	--



TAA Compliance: This product is manufactured in France, a TAA-designated country, and is fully compliant with the Trade Agreements Act (17 U.S.C. & 2501-2581).

 Specifications subject to change without prior notice